




INSTALLATION INSTRUCTIONS

MAKE: DODGE
MODEL: CUMMINS
YEAR: 2007.5-2009
ENGINE: L6-6.7L (td)
WHEELBASE: 140.5" & 160.5"

**4" Turbo-Back
49-42009 (409SS)
49-12009 (Aluminized)**

THIS PART IS FOR RACE USE ONLY

This is a "Race Only" Product Used solely for Competition. Its use is limited to closed-course and open-course racing that is formally sanctioned by a recognized racing organization. Any other use, including recreational off-road use, could be in violation of local, state and federal laws. This system also requires an aftermarket electronic module to work properly with the vehicle.

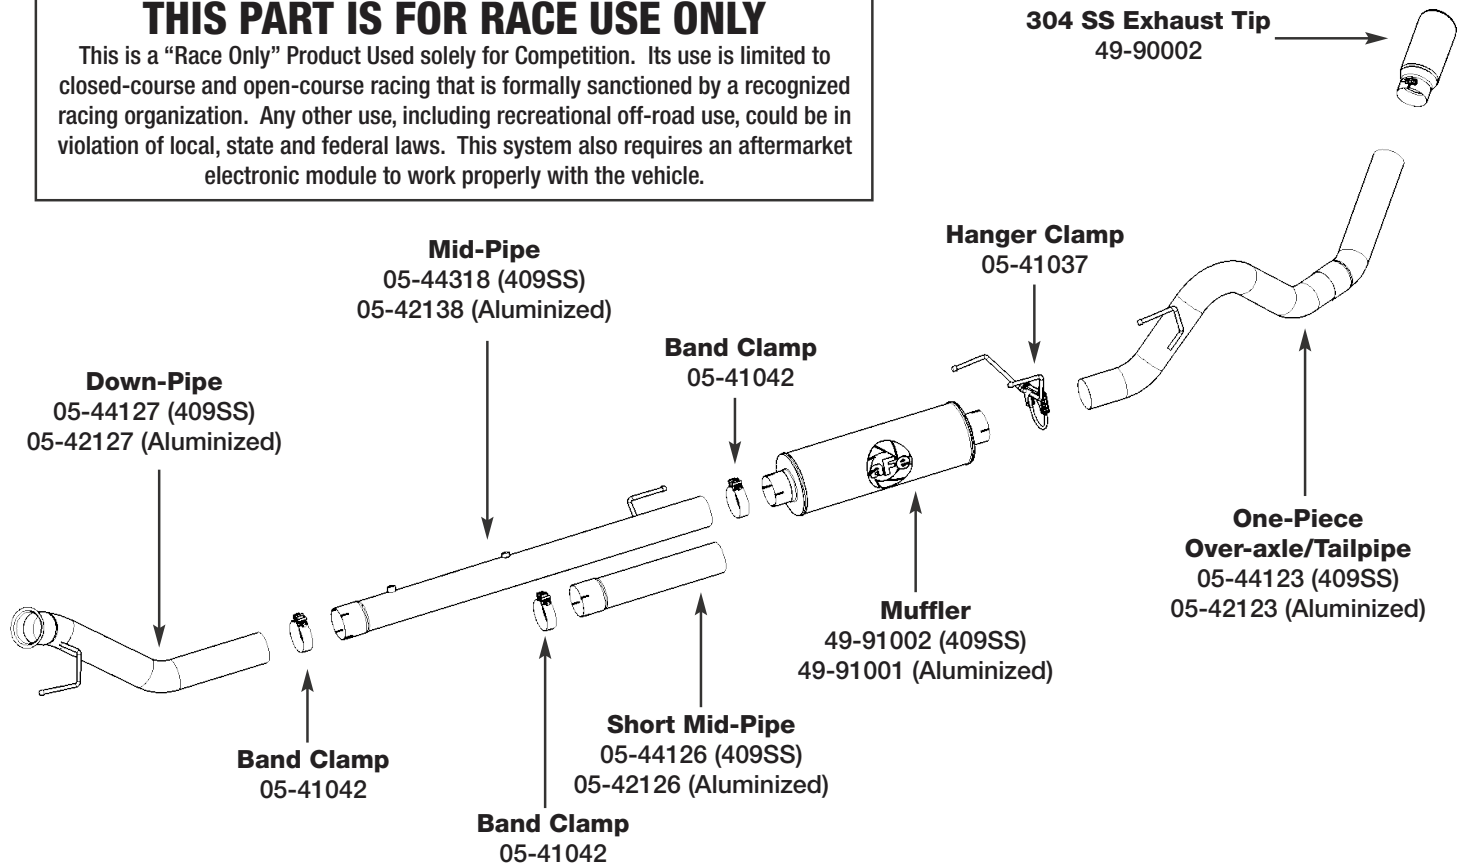

Step 1: (Read Instructions prior to installation) Remove your stock exhaust from the rear of your truck working your way forward. It may be necessary to remove front crossmember for turbo downpipe removal. Take caution not to damage the factory isolation mounts as they will be reused. Disconnect sensors at the connections. Take caution as not to damage any sensors. **It is recommended to not fully tighten the clamps until the entire system has been installed.**

Step 2: For ease of installation spread the pieces of the exhaust along side of your vehicle according to the diagram shown above.

Step 3: Install downpipe first, then install the mid-pipes with the band clamps. Be sure to select the correct mid-pipe depending on the wheelbase length. Longer wheelbases will use both mid-pipes. Short wheelbases will not use short mid-pipe. Do not fully tighten.

Step 4: Install the muffler using the two clamps indicated. Do not fully tighten.

Step 5: Utilizing the factory isolation mounts now install over-axle/tail-pipe. Re-install (2) O2 sensors and connect to harness. Cap off the unused pressure differential connections using the shortest rubber hose to link both sides of the pressure sensor.

Step 6: Adjust for alignment, install exhaust tip and tighten all connections. Your installation is now complete. It is recommended to re-tighten all exhaust components after the first 50-100 miles.

NOTE:

- aFe recommends that the tailpipe be at least 1/2"-1" away from any body panels to avoid heat related body damage. **Tighten and secure.**

Caution: Allow time for your vehicle to cool down prior to installation. When working on or under your vehicle proceed with caution. Exhaust systems reach high temperatures and may cause serious burns. Wear protective safety equipment; eye goggles and gloves to ensure a safe installation. **aFe recommends professional installation on our products.**